 **Europäisches Patentamt**  
**European Patent Office**  
**Office européen des brevets**

(11) Publication number: **0 174 188**  
**A2**

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number: 85306262.8

(51) Int. Cl.<sup>4</sup>: **B 65 D 81/34**

(22) Date of filing: 04.09.85

(30) Priority: 06.09.84 US 647882

(43) Date of publication of application:  
12.03.86 Bulletin 86/11

(84) Designated Contracting States:  
DE FR GB IT NL SE

(71) Applicant: MINNESOTA MINING AND  
MANUFACTURING COMPANY  
3M Center, P.O. Box 33427  
St. Paul, MN 55133(US)


(72) Inventor: Isakson, Gary A. c/o Minnesota Mining and  
Manufacturing Company 2501 Hudson Road  
St. Paul Minnesota 55133-3427(US)

(72) Inventor: Larson, Curtis L. c/o Minnesota Mining and  
Manufacturing Company 2501 Hudson Road  
St. Paul Minnesota 55133-3427(US)

(74) Representative: Baillie, Iain Cameron et al,  
c/o Ladas & Parry Isartorplatz 5  
D-8000 München 2(DE)

(54) Self-venting vapor-tight microwave oven package.

(57) A vapor-tight package (17) having a deposit (16) comprising nonmetallic, microwave-absorbing particles such as graphite dispersed in nonmetallic binder. When heated in a microwave oven, heat built up in the particles may soften and weaken the underlying packaging material (18), thus venting the package (17).

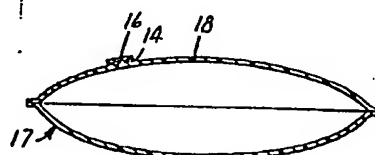

**FIG. 2**

SELF-VENTING VAPOR-TIGHT MICROWAVE OVEN PACKAGE

Technical Field

The invention concerns a vapor-tight package  
5 including means automatically venting the package when it  
is heated in a microwave oven.

Background Art

Instructions for heating vapor-tight packages in  
10 a microwave oven usually call for first piercing each  
package with a sharp utensil. See, for example, Fig. 22 of  
U.S. Patent No. 4,425,368 (Watkins). Vapor-tight frozen  
food packages which comprise polymeric or plastic film can  
be hard to pierce, and one may think that the film has been  
15 pierced when it has only been indented. If the film is not  
pierced, vapor pressures built up during heating may cause  
the package to explode. Instead of exploding, the package  
may rip at a seam through which the contents may spill out  
into the oven.

20 A number of self-venting, vapor-tight microwave  
oven packages have been proposed. Each of the packages  
shown in U.S. Patent No. 4,013,798 (Goltsos) consists of a  
compartmented plastic tray across which is sealed a plastic  
film. A side wall of one or more of the compartments has a  
25 notch at which the plastic film is less well sealed so that  
a buildup of vapor pressure in a compartment breaks the  
seal at the notch to vent the compartment.

U.S. Patent No. 4,292,332 (McHam) concerns a  
vapor-tight package for popping popcorn in a microwave  
30 oven. Its top wall is provided with lines of weakness that  
will begin to rupture at a vapor pressure less than that  
which would cause the bag to explode.

U.S. Patent No. 4,141,487 (Faust et al.) concerns  
a vapor-tight package comprising a plastic film which is  
35 formed with a slit along a crease line. The edges of the  
slit are sealed together by an adhesive sealant material

that melts below the cooking temperature to open the slit and thereby release vapors.

5 U.S. Patent No. 4,404,241 (Mueller et al.) concerns a vapor-tight package comprising a heat-resistant sheet formed with apertures, and bonded to that sheet is a continuous heat-softening material which extends across the apertures. Rising temperatures and pressures within the package cause the heat-softening material to flow to create vents through the apertures.

10 U.S. Patent No. 4,390,554 (Levinson) concerns a vapor-tight, multi-layer microwave oven package including a liquid-barrier plastic film 4 such as nylon or polyester which is "designed to vent at a preselected temperature by blow out plugs 13 or can be constructed of a low temperature plastic (as polyethylene) formulated to melt at a  
15 predetermined temperature". See col. 4, lines 30-40, and Fig. 1.

U.S. Patent No. 4,210,674 (Mitchell) illustrates  
20 a tray which is hermetically sealed by a plastic film to which a narrow strip of aluminum foil is adhesively secured. When the aluminum foil has certain dimensions, it converts microwave energy to heat sufficient to melt the plastic film, thus venting the package. When we constructed such a package, the venting did occur, but there  
25 was visible and audible arcing which would probably be objectionable to prospective users. Also, it was difficult to adhere such a narrow strip of aluminum foil to a plastic film. Furthermore, many food processors routinely monitor their products to locate any hazardous metal objects, and  
30 such an aluminum strip might interfere.

The Mitchell patent suggests at column 3, lines 18-30 that substitutes for the aluminum foil include "silver micropaint", "a copper-filled coating" and "dispersions of metal powder", and that such substituents  
35 may be applied by "a printing wheel or a spray applicator".

Other Prior Art

U.S. Patent No. 4,434,197 concerns a reusable flexible sheet containing semi-conductive or energy-absorbing material such as colloidal graphite, ferric oxide and carbon (col. 5, lines 26-32). When the sheet is wrapped around food to be cooked in a microwave oven the semi-conductive material becomes hot enough to permit browning or crisping of the food. The semi-conductive material is encapsulated between layers of polytetrafluoroethylene which is so heat resistant that the sheet can be reused.

Disclosure of Invention

The invention concerns a vapor-tight package including means for automatically venting through the package upon heating in a microwave oven, as do the vapor-tight packages of the patents discussed above under "Background Art". The novel package differs from the above-discussed prior packages in that its venting means is a deposit which is adhered to the package and comprises nonmetallic, microwave-absorbing particles dispersed in a nonmetallic binder, preferably a polymeric binder, which deposit has a thickness within the range from 10 to 300 micrometers, said particles comprising at least 10% by weight of said deposit.

Preferred nonmetallic, microwave-absorbing particles are graphite and carbon black particles. Somewhat less, but still highly absorptive of microwave energy, are iron oxide and ferrite particles. All such nonmetallic particles which are highly-absorptive of microwave energy are hereinafter called "microwave-absorbing particles".

When the package comprises heat-sensitive material such as thermoplastic film and the deposit is adhered to the film, heating of the particles by microwaves can soften and weaken that portion of the film to which the deposit is adhered, thus venting the package through that

portion. When an unfilled adhesive layer adheres the deposit to a packaging material which is to be weakened by heat from the particles, that adhesive layer should be thin to afford good heat transfer, preferably from 10 to 20 micrometers.

When the deposit itself is impervious to vapors, but softens and weakens when heated by the particles, it can be positioned over a weakness in the package such as an opening, a slit, or a score. When so used, it may be desirable to cover the deposit with a vapor-impervious thermoplastic film. Upon doing so, heat from the particles may either soften and weaken the covering thermoplastic film, or venting may occur laterally through the deposit or through an unfilled adhesive layer by which the deposit is adhered over a weakness of the package.

For economy, the nonmetallic binder of the deposit should be the minimum proportion that will firmly anchor the microwave-absorbing particles but, when the binder also serves to adhere the deposit to the package, that proportion should be high enough to assure good adhesion. The particles should be firmly anchored when the binder comprises at least 30% by weight of the deposit, but when the binder also serves as an adhesive, it preferably comprises more than 50 weight percent of the deposit. When a separate adhesive coating is used, the binder preferably comprises from 30 to 80 weight percent of the deposit. Particles which are substantially less absorptive of microwave energy than is graphite preferably comprise about 60% by weight of the deposit.

The dispersion of microwave-absorbing particles in nonmetallic binder can be printed or otherwise directly deposited onto the packaging. When printed, the deposit can form an alpha-numeric message or a distinctive pattern that informs the user of the self-venting nature of the package. Whether printed or cut from a preformed sheet, the deposit may be shaped to concentrate the microwave energy. Preliminary experiments suggest that notches in

the edges of the deposit have such effect, but this has not been confirmed. Preferably the deposit has a distinctive shape to remind the user by its very appearance that the package is self-venting and to position the package in the oven so that nothing spills when the vent forms. For such reasons, the deposit preferably is highly conspicuous. The deposit may have the shape of a logo or trademark to identify the company marketing the package.

For convenience and economy, the deposit may be a piece of a layer of tape which itself is believed to be novel. Such a tape comprises

a carrier web,

adhered to the carrier web a layer of particles selected from a graphite and carbon black dispersed in nonmetallic binder, said particles comprising at least 10% by weight of the layer, the layer having a thickness within the range from 10 to 300 micrometers, and

means for adhering a piece of said layer to a package to provide self-venting of the package in a microwave oven.

The particle-containing layer may be coextensive with the carrier web and may be die-cut in the form of individual shapes such as a star or a diamond, at least one piece to be adhered to each package to provide a venting deposit. While the nonmetallic binder may serve to adhere the pieces to a package to be vented as is pointed out above, the tape may include an unfilled adhesive layer.

The carrier web of the tape may have a low-adhesion surface from which pieces of the particle-containing layer can be cleanly peeled, thus permitting the carrier web to be reused. On the other hand, the carrier web can remain firmly adhered to the deposit. When the carrier web is vapor-impervious and is selected to soften and weaken when the microwave-absorbing particles of the deposit are heated by microwave energy, the package can be made with a heat-resistant plastic film such as cellophane which the

deposit would not soften by positioning the deposit over a weakness in the package such as an opening, slit, or score.

To insure reliable venting before a package explodes due to vapor pressure buildup, the deposit  
5 preferably has a thickness of at least 20 micrometers and a width of at least 5 mm in all directions. At lesser dimensions, heat might be conducted or radiated away from the microwave-absorbing particles before it could produce the desired venting. Thicknesses greater than 100  
10 micrometers may be economically wasteful and may cause arcing in a microwave oven.

Because of lateral heat conduction, the venting usually occurs at the center of the deposit. A deposit in the shape of a "C" or "U" tends to produce venting along a  
15 correspondingly shaped line, and this may open a flap to create quite a large vent. A vent produced by a small circular deposit may be so small that vapor pressures are not sufficiently relieved to avoid an explosion. For this reason, a circular deposit preferably is at least 5 mm in  
20 diameter, more preferably at least 1.0 cm in diameter. Larger packages may have several vent-producing deposits to insure against explosion.

For convenience to the user, the deposit may be placed at a position to enhance the opening of the package  
25 to remove its contents. When the package comprises an oriented thermoplastic film, such positioning may take advantage of the tear characteristics of the film.

The novel vapor-tight package may comprise a thermoplastic film sealed across the rim of a tray or the  
30 mouth of a jar with the deposit adhered to the film. If the thermoplastic film envelops a tray, the deposit preferably is applied to the film at a position within the rim of the tray.

Self-venting packages of the invention can be put  
35 to uses other than in a microwave oven. A package which is intended for processing in boiling water may employ a deposit which does not vent at 100°C.

The self-venting deposit usually, but not necessarily, is intended for application to the exterior of a package. When a package comprises two plies of thermoplastic film, the deposit may be positioned between the two plies.

#### Brief Description of the Drawing

In the drawing:

Fig. 1 is a schematic edgeview of a first tape of the invention which is useful for making a self-venting, vapor-tight package of the invention;

Fig. 2 is a schematic sectional view of a pouch-like package of the invention wherein a piece of the tape of Fig. 1 provides a self-venting deposit;

Fig. 3 is a schematic edgeview of a second tape of the invention;

Fig. 4 is a schematic sectional view of a second package of the invention wherein a piece of the tape of Fig. 3 provides a self-venting deposit;

Fig. 5 is a fragmental schematic top view of a third self-venting microwave oven package of the invention; and

Fig. 6 fragmentally shows in perspective a fourth self-venting microwave oven package of the invention.

#### Detailed Description

The tape 10 shown in Fig. 1 has a low-adhesion silicone paper carrier web 12 to which is releasably adhered a pressure-sensitive adhesive layer 14. Adhered in turn to the adhesive layer 14 is a layer 16 consisting of a dispersion of graphite particles in a polymeric binder. The tape 10 with its carrier web 12 can be wound upon itself for convenience in storage and shipment.

Upon peeling off the carrier web 12, a rectangular piece of particle-containing layer 16 of the tape is adhered by its adhesive layer 14 to a vapor-tight, pouch-like package 17 (Fig. 2) comprising thermoplastic



film 18. When the package 17 is heated in a microwave oven, heat generated by microwave energy absorbed by the graphite particles of the layer 16 softens and weakens the underlying portion of the thermoplastic film 18, whereupon vapor pressure generated in the package vents the package 17 through that portion and the deposited piece of the tape.

The tape 20 shown in Fig. 3 consists of a low-density polyethylene carrier web 22 to which is adhered a layer 24 that is a dispersion of colloidal graphite particles in a pressure-sensitive adhesive. When the open face 25 of the carrier web 22 has a low-adhesion surface, the tape 20 can be wound upon itself for convenient storage and shipment.

The package 30 shown in Fig. 4 has a molded plastic tray 32 across which is sealed a thermoplastic film 34. Adhered to the outer surface of the thermoplastic film is a deposit of a piece of the tape 20 of Fig. 3 which covers a perforation 36 in the plastic film. Heat generated by microwave energy absorbed by the graphite particles of the layer 24 softens and weakens both the adhesive of the layer 24 and the polyethylene web 22 to vent the package.

The fragment of a package 40 shown in Fig. 5 includes a thermoplastic film 42 to which is adhered a deposit 44 consisting of microwave-absorbing particles dispersed in an organic binder. The distinctive U-shape of the deposit 44 may be created either by printing a dispersion of the particles in a solution of the binder, or by die-cutting such a shape from the particle-containing tape 10 of Fig. 1 and adhering that shape by its adhesive layer 14 to the plastic film 42. Notches 45 in the edges of the deposit 44 may concentrate the absorbed microwave energy. When the particles are heated by microwave energy, that heat flows to and tends to soften and weaken the film 42 along the dotted line 46 which may result in a flap-like vent. When a package as shown in Fig. 5 was tested, the

flap-like vent served as a pull tab for tearing the package.

5 The fragment of a package 50 shown in Fig. 6 includes a plastic film 52 to which a piece 54 of a microwave-absorbing particle-filled layer is adhered by an adhesive layer 56 which softens and melts at a temperature lower than does the binder of the piece 54. Before doing so, a slit 58 was made in the film 52. Thus the package 50 is vented when the vapor pressure builds to a level  
10 sufficient to soften and open a channel laterally through the adhesive layer 56. The slit 58 would not be visible through the piece 54 due to the opacity provided by its microwave-absorbing particles.

15 In the following examples, all parts are by weight except as noted.

#### Example 1

The following were placed in a glass jar and mixed overnight on a laboratory shaker:

- 20 45 grams - Practical graphite powder (GX-0279,  
Matheson - Coleman & Bell, Norwood, OH)  
45 grams - Soluble polyester of (on a molar basis)  
terephthalic acid (23%), isophthalic acid  
(21%), aliphatic diacids (7%), ethylene  
25 glycol (27%), and neopentyl glycol (21%),  
available as "Vitel PE 222" from B. F.  
Goodrich.  
114.6 grams - Toluene  
20.4 grams - Methyl ethyl ketone

30

The resulting dispersion was coated onto a 40-micrometer thick biaxially-oriented polypropylene film using a laboratory knife coater with a 250-micrometer orifice; then dried in an oven at 66°C for 10 minutes. A layer of  
35 pressure-sensitive adhesive was laminated to the dried coating to provide a tape of the invention.

For testing purposes, a pouch of frozen corn was purchased at a grocery store. The pouch was believed to be a laminate of polyethylene film and biaxially-oriented polyethylene terephthalate film, the latter at the exterior. A 2.54 x 2.54 cm piece of the tape of the invention was adhered by its adhesive layer to the pouch while the corn was frozen, and the polypropylene film was peeled off and discarded. Following instructions on the corn package except not puncturing the pouch, the corn was cooked for 7 minutes in a microwave oven. At three minutes, the pouch vented automatically through the tape deposit, and steam continued to escape through the vent during the final four minutes.

#### Example 2

The following were placed in a glass jar and mixed overnight on a laboratory shaker:

8 grams - Carbon black ("Monarch 700" from Cabot Corp., Boston, MA).

8 grams - Soluble polyester of Example 1

54.4 grams - Toluene

9.6 grams - Methyl ethyl ketone

The resulting dispersion was coated over a release coating on a 40-micrometer thick biaxially-oriented polypropylene film using a laboratory knife coater with a 250-micrometer orifice; then dried in an oven at 66°C for 10 minutes. A layer of pressure-sensitive adhesive was laminated to the dried coating. The polypropylene film was then removed, and another layer of the same adhesive was laminated to the exposed face of the dried coating.

Used for testing purposes was a 10 by 15 cm pouch of a duplex film, the outer layer of which was biaxially-oriented poly(ethylene terephthalate) film and the inner layer of which was polyethylene. After inserting a paper towel and 12 ml of water, the pouch was sealed. A 2.54 by 2.54 cm piece of the double-coated tape was adhered by its

second adhesive layer to the exterior of the pouch. When the pouch was placed in a microwave oven (high setting), within 12 seconds the pouch vented through the duplex film beneath the deposited piece of tape.

5

Example 3

The following were placed in a glass jar and mixed overnight on a laboratory shaker:

10           50 grams - 22% solution of a pressure-sensitive adhesive copolymer of isooctyl acrylate (95.5) and acrylic acid (4.5) in heptane and isopropyl alcohol.

11 grams - Practical graphite powder of Example 1

15           The resulting dispersion was coated onto silicone-coated release paper using a laboratory knife coater with a 300-micrometer orifice; then dried in an oven at 66°C for 10 minutes. A 50-micrometer low-density polyethylene film was laminated to the exposed surface of the dried coating, with the pressure-sensitive adhesive copolymer of the  
20           coating serving as the laminating adhesive, thus providing a tape of the invention.

            A 1.3 by 5.1 cm piece of the tape, after stripping off the release paper, was adhered by the  
25           adhesive matrix of the graphite layer to a pouch containing a paper towel and water as described in Example 2. The pouch was then placed in a microwave oven (high setting). Within one minute, heat generated in the graphite powder weakened the pouch immediately beneath the tape deposit, thus venting the pouch through the weakened spot.  
30

Example 4

            A tape was made having at its backing a plastic film (believed to be polytetrafluoroethylene) 250  
35           micrometers thick, throughout which was dispersed graphite powder comprising 40% by weight of the backing ("DC 7035" from Dixon Industries, Bristol, RI). To one face of the



backing was laminated a layer of unfilled pressure-sensitive adhesive to provide a tape of the invention.

A 2.5 by 2.5 cm piece of the tape was adhered by its adhesive layer to a pouch containing a paper towel and water as described in Example 2. The pouch was placed in a microwave oven (high setting) for one minute. The tape weakened the bag at the spot it was applied, and the pressure built by the steam ruptured through the bag but not the tape. Instead, the steam channeled through the adhesive and the pressure was relieved.

#### Example 5

A 3.8 by 1.3 cm piece of tape as described in Example 1 was placed over a 2.5 cm slit in a paper/aluminum-foil/polyethylene lid (137.5 micrometers thick) called "Wet Cadet Lid Stock" that had been sealed to the top of a 37-ml high-density polyethylene unit dose cup which was half full of water. The cup was then placed in a microwave oven (high setting) and vented through the piece of tape soon after a slight bulging of the flexible lid was observed.

The term "vapor-tight package" is intended to encompass packages which contain a pressure-release valve of the type currently being used on some coffee packages.

## CLAIMS:

1. A vapor-tight package including means for automatically venting through the package upon heating in a microwave oven, characterized by the feature that the venting means is a deposit (16, 24, 44, 54) which is adhered to the package (17, 30, 40, 50) and comprises nonmetallic, microwave-absorbing particles dispersed in a nonmetallic binder which deposit (16, 24, 44, 54) has a thickness within the range from 10 to 300 micrometers, said particles comprising at least 10% by weight of said deposit (16, 24, 44, 54).

2. A package (17, 30, 40, 50) as defined in claim 1 further characterized by the feature that the microwave-absorbing particles are graphite.

3. A package (30, 50) as defined in claim 1 further characterized by the feature that the package (30, 50) comprises a plastic film (34, 52), said deposit (24, 54) covering a weakness (36, 58) in the plastic film (34, 52).

4. A package (30) as defined in claim 1 further characterized by the feature that the binder is an adhesive which adheres the deposit (24) to the package (30).

5. A package (40) as defined in claim 1 further characterized by the feature that the deposit (44) is printed.

6. A package (17, 30, 40, 50) as defined in claim 1 further characterized by the feature that said deposit (16, 24, 44, 54) has a thickness from 50 to 75 micrometers and a minimum breadth of 5 mm.

0174188

7. A tape (10, 20) for use in making the package of claim 1 characterized by a carrier web (12, 22, 56) adhered to the carrier web a layer (16, 24, 54) of particles selected from graphite and carbon black dispersed in nonmetallic binder, said particles comprising at least 10% by weight of the layer, the layer having a thickness with the range from 10 to 300 micrometers, and means (14, 24, 56) for adhering a piece of said layer to a package (17, 30, 50) to provide self-venting of the package in a microwave oven.

8. A tape (10) as defined in claim 7 further characterized by the feature that the carrier web (12) has a low-adhesion surface from which said particle-containing layer (16) is readily separated.

9. A tape (10, 20) as defined in claim 7 further characterized by the feature that the microwave-absorbing particles are graphite.

10. A tape (20) as defined in claim 7 further characterized by the feature that the binder is an adhesive (24) which functions as said means for adhering.

11. A tape (10) as defined in claim 7 further characterized by the feature that the adhering means is a layer of unfilled adhesive (14) covering the layer of particles.

12. A tape as defined in claim 7 further characterized by the feature that said carrier web is a thermoplastic film (56) to which the particle-containing layer (54) is permanently adhered, which thermoplastic film (56) is softened and weakened by heat generated in the particles when they absorb microwave energy.

0174188

13. A method for venting in a microwave oven a vapor-tight package (17, 30, 40, 50), said method characterized by comprising the sequential steps of:

(1) dispersing nonmetallic microwave-absorbing particles in a binder to provide a dispersion (16, 24, 44, 54), of which said particles comprise at least 10% by weight and

(2) depositing a piece of the dispersion (16, 24, 44, 54) onto said package, which piece has a thickness within the range from 10 to 300 micrometers.

14. A method as defined in claim 13 further characterized by the feature that the binder is an adhesive (24) which adheres strongly to the plastic film.

15. A method as defined in claim 13 further characterized by the feature that prior to step (2) the dispersion is formed into a strip (16, 54), there is an additional step of applying an adhesive layer (14, 56) to the strip (16, 54), and a piece of the adhesive-bearing strip (10) is adhered by said adhesive layer to the package (17, 50) in step (2).



